



Resfab

Multi-Basket Open Double Banked Fryer



Full Size Basket




2 Half Size Baskets

Model: MB-502AT-2 vats 55 lb. Oil Capacity per vat

- **Multi-Basket Configurations:** The Auto-Lift System allows for the use of one large basket or two independently operating half-size baskets per well.
- **Idle mode**
- **“Sleep Mode” Equals Oil Savings:** Fryer automatically goes into Sleep Mode at 200°F after 30 minutes of non-use. There are two additional pre-set idles programs.
- **Zero recovery Time:**
The operator can fry batch after batch without waiting for the fryer temperature to recover.
- **No Manipulation of Hot Parts:**
The filtration tank slides into the fryer’s self-leveling connection and automatically connects to the pump pipe; **reducing risk of injury as no hot parts to touch.**
- **Easy and Safe Transportation & Removal of Shortening/Oil:**
A removable handle attaches to the filtration tank which comes equipped with casters.
- **Independent Power Supply:**
Each vat has its own power supply. If a problem occurs with one vat, the other vat will continue to operate.

Touch Screen Controller Feature

- **User Friendly:**
Each screen is easy to navigate and operator friendly, simplifying training and daily operation.
- **40 Programmable Menus:**
Including: Product name, cook time, temperature, alarm to “add product”, “stir”, “end alarm” and more.
- **P.I.N. for the Controller Access:**
The Personal Identification Number controls the direct access to programs such as “Menu”, “Filtering lock-out”, and more.
- **Oil Filtering Lock-out:**
The filtering lock-out allows the operator to pre-set the filtering frequency. There is no filter over-ride without the P.I.N., leading to a better quality product and oil, and increased oil savings.
- **Warnings** informs the operator of the state of the drain and discharge / rinse mode.
- **No filter override**

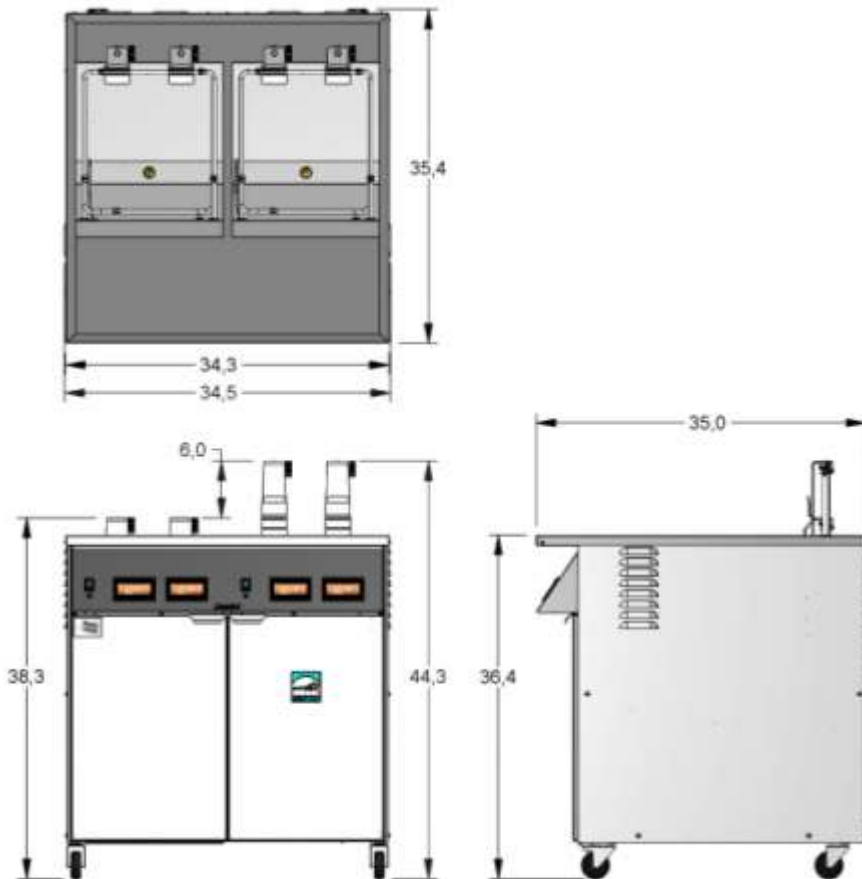

Electrical

MB-502AT			
Voltage	208		240
Heater KW	2 x 14.4		
Phase	1	3	1
Amperage*	1 x 74 Amps 1 x 72 Amps	1 x 45 Amps 1 x 43 Amps	1 x 65 Amps 1 x 63 Amps
			1 x 39 Amps 1 x 37 Amps

***Each vat must be connected on a separate dedicated circuit breaker**

Dimensions:

Width (in)	34.5
Depth (in)	35.4
Height (in)	36.4 – 38.3 w/ elevators down
Vat (in)	Square 15.63 x 16.75
Crated Weight (lbs)	477 lbs

Capacity

Shortening	2 x 55 lbs
Chicken Fresh Breaded*	64 pcs

* Based on 3 lb fresh breaded chicken, 8 pc. cut



Continuing product improvement may subject specifications to change without notice

RESFAB EQUIPMENT INC.

735 Rossiter, St-Jean-sur-Richelieu, (Montréal), Québec, Canada, J3B 8A4
 Tél.: (450)-359-0800, Fax: (450)-359-0296, Toll Free: 1-866-359-0808
 E-mail: info@resfab.com WWW.RESFAB.COM